


**NOTES**

1. Support bolts shall be equal to Curb Face + 4"
2. Support bolts shall be installed when W exceeds 7'-0" and shall be spaced at not more than 7'-0" o.c. and not less than 5'-0" o.c.
3. All exposed metal parts shall be galvanized. All galvanizing damaged by welding shall receive two coats of Aluminum Paint.
4. Length of Bulb Angle shall be equal to W + 2T.

REVISION	NEW BULB ANGLE 8' x 3 1/2' x 16'	October 1966
CITY OF COLTON PUBLIC WORKS DEPT.		
DETAIL OF CATCH BASIN OPENING - TYPE "A"		
DRAWN BY	G.W.A.	SCALE 1/4" = 1'
CHK'D	<i>DHB</i>	DATE OCT. 1963
APP'D	<i>C. Blume Wilson</i>	DRAWING NO. 203

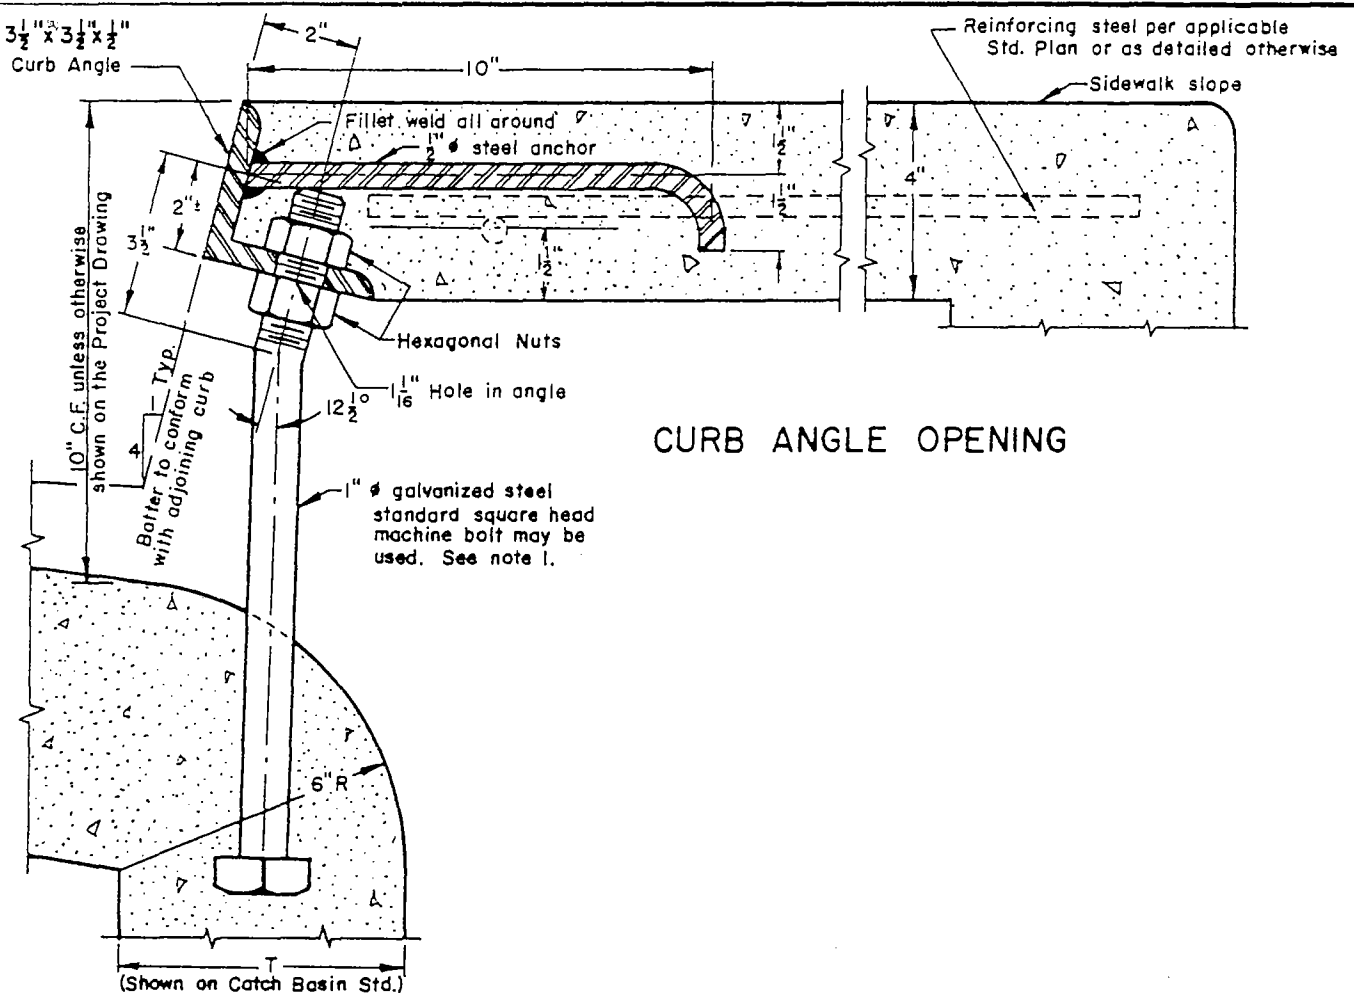

### CURB ANGLE OPENING

#### NOTES

1. SUPPORT BOLTS SHALL BE EQUAL TO CURB FACE + 4"
2. SUPPORT BOLTS SHALL BE INSTALLED WHEN W EXCEEDS 7'-0" AND SHALL BE SPACED AT NOT MORE THAN 7'-0" O.C. AND NOT LESS THAN 5'-0" O.C.
3. ALL EXPOSED METAL PARTS SHALL BE GALVANIZED. ALL GALVANIZING DAMAGED BY WELDING SHALL RECEIVE TWO COATS OF ALUMINUM PAINT.
4. LENGTH OF CURB ANGLE SHALL BE EQUAL TO W + 2T.

CITY OF COLTON PUBLIC WORKS DEPT.		
DETAIL OF CATCH BASIN OPENING - TYPE "B"		
DRAWN BY G.W.A.	SCALE 1" = 1'	DRAWING NO.
CHK'D <i>[Signature]</i>	DATE AUGUST 1963	203
APP'D <i>[Signature]</i>		