


NOTES-

1. THE MANHOLE FRAME AND COVER SHALL BE MADE OF GRAY CAST IRON CONFORMING TO THE LATEST SPECIFICATIONS OF THE CITY OF PASADENA.
2. ALL PARTS OF THE MANHOLE FRAME AND COVER EXCEPT MACHINED SURFACES SHALL BE COATED WITH ASPHALTUM PAINT.
3. THE MANHOLE FRAME AND COVER SHALL BE TESTED FOR ACCURACY OF FIT AND SHALL BE MARKED IN SETS BEFORE DELIVERY. THE COVER SHALL FIT THE FRAME SNUGLY BUT NOT TIGHTLY.
4. COVERS FOR USE ON SEWER STRUCTURES SHALL BEAR THE LETTER 'S' AND ON STORM DRAIN STRUCTURES THE LETTER 'D'.
5. THE WEIGHTS OF THE FRAME AND COVER SHALL NOT VARY MORE THAN TWO PER CENT FROM THOSE GIVEN HEREON.

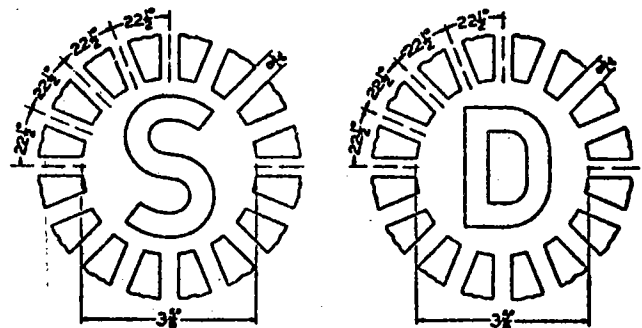

**CITY OF PASADENA
ENGINEERING-STREET DEPARTMENT
STANDARD TRAFFIC MANHOLE FRAME & COVER**

<p>STANDARD PLAN B-2855 CITY OF LOS ANGELES</p>	<p>APPROVED BY <i>M. J. Wesseler</i> APPROVED BY <i>Fritz Gapp</i> CITY ENGINEER & SUPT. OF STREETS DATE APPROVED ... DEC. 1, 1959.</p>	<p>DRAWING NUMBER G-1577</p>
--	---	---