


PLAN VIEW

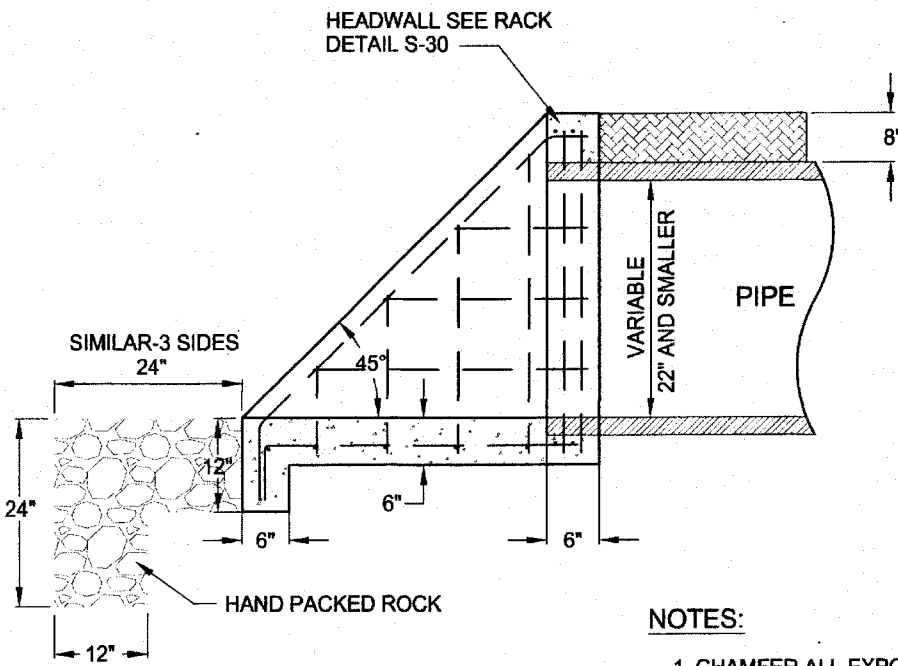

SECTION A-A

NOTES:

1. CHAMFER ALL EXPOSED EDGES OF CONCRETE
2. USE CLASS B CONCRETE
3. PROVIDE TRASH RACK IN ACCORDANCE WITH D-18 MODIFIED (WITHOUT SIDE BARS)
4. ALL REINFORCING SHALL BE #4@12"CC.
5. COMPACT SUBGRADE TO 90% RELATIVE COMPACTION. SCARIFY AND RECOMPACT TOP 6" TO 95% RELATIVE COMPACTION.

REV.	DATE	DESCRIPTION