


1 COVER REQUIRED

CASE 1: 3' x 18" (900 mm x 450 mm) TREE WELL  
 CASE 2: 4' x 24" (1200 mm x 600 mm) TREE WELL

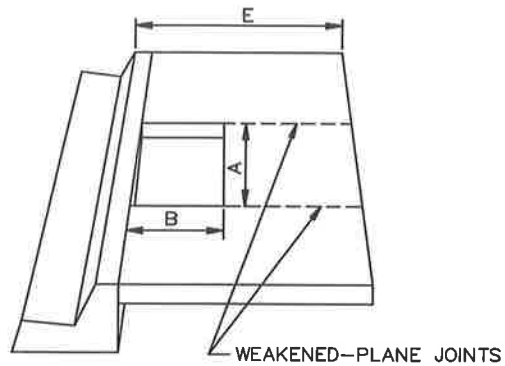


2 COVERS REQUIRED

CASE 3: 3' x 3' (900 mm x 900 mm) TREE WELL  
 CASE 4: 4' x 4' (1200 mm x 1200 mm) TREE WELL

### TREE WELLS

CASE	A	B	C	D	E	R
1	3'-0" (900 mm)	18" (450 mm)	2'-11" (975 mm)	17 1/2" (450 mm)	5'-0" (1500 mm) MIN	9" (225 mm)
2	4'-0" (1200 mm)	24" (600 mm)	3'-11" (1175 mm)	23 1/2" (600 mm)	5'-6" (1650 mm) MIN	15" (375 mm)
3	3'-0" (900 mm)	3'-0" (900 mm)	2'-11" (975 mm)	17 1/2" (450 mm)	6'-6" (1950 mm) MIN	9" (225 mm)
4	4'-0" (1200 mm)	4'-0" (1200 mm)	3'-11" (1175 mm)	23 1/2" (600 mm)	7'-6" (2250 mm) MIN	15" (375 mm)

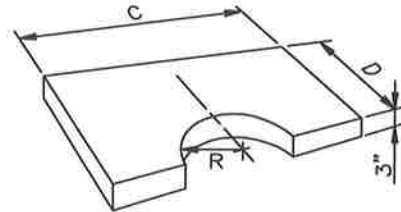

### POROUS TREE WELL COVER (SEE NOTE 2)

#### NOTES FOR TYPE 3 TREE WELL

- SEE SHEET 7 FOR NOTES PERTAINING TO THE SHEET.
- PERMEABLE (POROUS) CONCRETE TREE WELL COVER:  
 THE COVER SHALL BE MADE OF PERMEABLE CONCRETE WITH A MINIMUM COMPRESSIVE STRENGTH OF 1200 PSI (8.5 MPa) AND SHALL BE PRECAST & REINFORCED WITH 2 1/4" X 2 1/4" (60 mm x 60 mm) 16 GAUGE WIRE MESH. CONCRETE SHALL CONSIST OF ONE PART CEMENT TO FOUR PARTS 3/8" (10 mm) GRAVEL AND APPROXIMATELY FOUR GALLONS (15 LITERS) OF WATER PER SACK OF CEMENT. THE GRAVEL SHALL BE CLEAN WITH FINES REMOVED. CURING COMPOUND TO WHICH WATER-PROOFING MATERIALS HAVE BEEN ADDED WILL NOT BE PERMITTED.

### TYPE 3