


CONCRETE COLLAR PER SHEET  
1 OF STD. DWG. 9-7A.

STANDARD 24" FRAME AND COVER. SEE  
NOTES ON SHEET 1 OF STD. DWG. 9-7A.

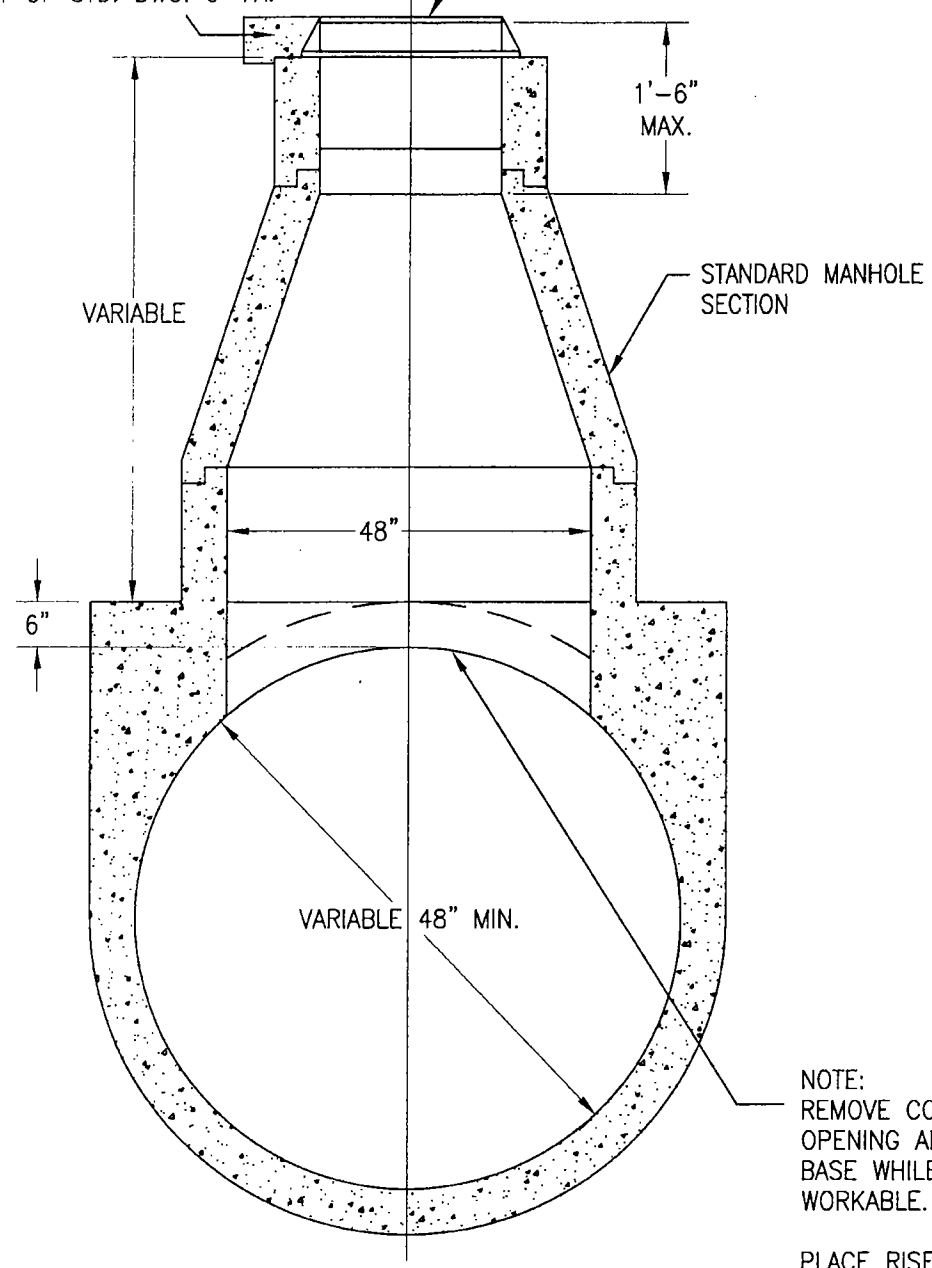

TYPE A  
CAST-IN-PLACE PIPE ONLY

NOTE:  
REMOVE CONCRETE IN MANHOLE  
OPENING AND CONSTRUCT RISER  
BASE WHILE CONCRETE IS STILL  
WORKABLE.

PLACE RISER SECTION AFTER  
CONCRETE HAS SET.

SEE SECTION 39, "MANHOLES",  
AND SECTION 36,  
"CAST-IN-PLACE  
CONCRETE PIPE".

SACRAMENTO COUNTY  
MUNICIPAL SERVICES AGENCY

**TYPE A**  
**SADDLE MANHOLE**

*Keith DeVore*  
DIRECTOR, DEPARTMENT OF WATER RESOURCES

DRAWN BY: M.FIELDS  
SCALE: NONE  
DATE: 11/98

**9-8A**