


CLEAN-OUT FOR PAVED AREAS

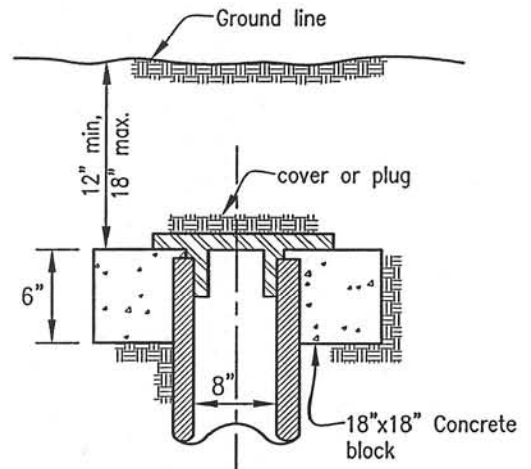

CLEAN-OUT FOR UNPAVED AREAS

NOTES:

1. All concrete shall be of class 560-C-3250.
2. Joints to be constructed with Wedgelock or approved equal.
3. A standard Wye connection and 45° bend shall be used to join a cleanout to main line.
4. In unpaved areas encasement of cleanout will not be required.
5. Cleanout cover and frame shall be per Alhambra Foundry, No. A1240 or approved equal.



3-25-04
DATE APPROVED

[Signature]
PUBLIC WORKS DIRECTOR/C.E.
[Signature]
ASSISTANT CITY ENGINEER

CITY OF ORANGE PUBLIC WORKS DEPARTMENT

SEWER CLEAN-OUT

STANDARD
PLAN No.
208