



PLAN


Provide cross bars on Type 36RX—optional spacing 4 or 6




SECTION

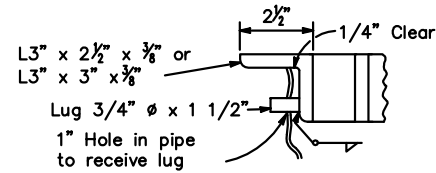

DETAIL A




SECTION




DETAIL B

GRATE DETAILS

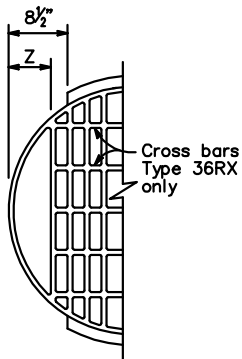

CROSS BAR DETAIL (WELDED STEEL)



$\frac{3}{8} \pm \phi$ Cross bars may be fillet welded, resistance welded or electroforged to bearing bars.

GRATE BAR SPACING TABLE

TYPE	No. OF BARS	CLEAR BAR SPACING	X	Y		Z
				4\"/>		
36RX (Steel)	15	2\"/>				

36RX GRATE DETAILS

LBIW Inc.
 2020 WEST 14TH STREET
 LONG BEACH, CA. 90813
 Tel No. : (562) 432.5451
 Fax No. : (562) 432.5929
 www.lbiw.com
FOUNDRY & FABRICATION

PRODUCT NUMBER

**36RX GRATE
 BICYCLE
 PROOF GRATE**

COATING

MILL FINISH OR
 GALVANIZED

EST. WEIGHT

WEIGHTS MAY VARY
 MINUS 5%, PLUS 10%

SPECIFICATION

D75A, D77B

OPEN AREA

DESIGNATES MACHINED

DRAWN

EB

DATE

03-09-09

REFERENCE INFORMATION

SECTION 08