



FACE ANGLE DETAIL "A"	
LENGTH OF CURB OPENING	NO. OF ANCHORS
3'-6" OR LESS	2
7'-0"	3
10'-0"	4
14'-0"	5
21'-0"	7

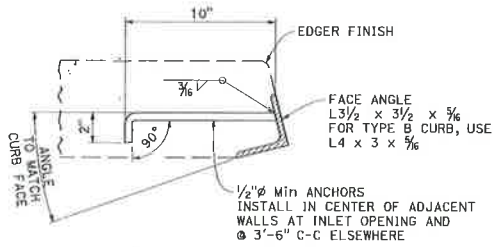

DETAIL "A"

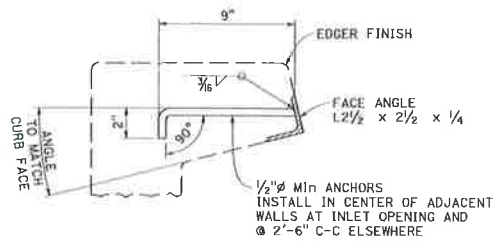

DETAIL "B"

**FACE ANGLE AND ANCHOR**

Sheet	COUNTY	ROUTE	POST MILES	SHEET TOTAL
			TOTAL PROJECT	SHEETS

*EMD*  
REGISTERED CIVIL ENGINEER


May 31, 2018  
PLANS APPROVAL DATE

STATE OF CALIFORNIA  
SHEL M. DORN  
C.S. 9916  
Exp. 6-30-19  
CIVIL  
STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

**NOTE:**


- When shown on the project plans, place a 3/4 inch plain round protection bar horizontally across the length of the opening and bend back 4 inches into the inlet wall on each side.




STEP INSERT

TYPICAL SECTION  
(STEP INSERT)

**STEP DETAILS**

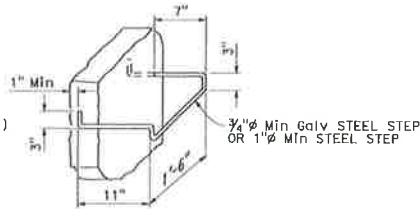


BAR STEP

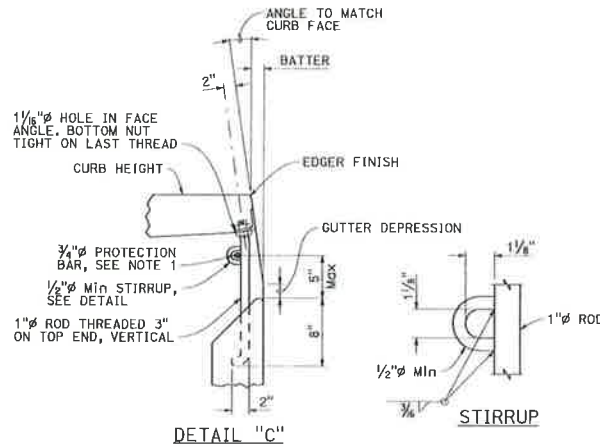


DETAIL "C"

**CURB SUPPORT**

CURB SUPPORTS SHALL BE EVENLY SPACED AND MINIMAL IN NUMBER SUCH THAT MAXIMUM SPAN OF UNSUPPORTED CURB IS 7'-0".



TYPE A CURBS



TYPE B CURBS

**CURB OPENING DETAILS**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**DRAINAGE INLET DETAILS**  
NO SCALE